

Portable Transit time Ultrasonic Flow Meter



Easy to install

Portable

Introduction

We are development of flow measurement technology. The products serve real-time flow measurement and process control in the production process.

Widely used in chemicals, irrigation, industrial process water, water supply, water treatment, boiler, etc.



- α Is an ultrasonic flowmeter based on transit-time schematic design.
- α Designed using the digital technology and low-voltage integrated circuit, it have broadband pulse transmission.
- α While principally designed for full-pipe and clean liquid applications. The instrument is tolerant of liquids with small amounts of air bubbles or suspended solids found in most industrial environments.
- α Integration design and high integration reduce the link between PCB boards, more reliable.
- α Have friendly menu selections make flow meter simple and convenient to use. It can easy to check daily, monthly and yearly totalized flow. Parallel operation of positive, negative and net flow totalizes.

Application

Ultrasonic flowmeter can be used in many industries, The meter used in the cleaning equipment industry, it is easy to install and operate, as well as stable measurement, and many industries are used.

Including: Water treatment, waterworks, chemical, irrigation, industrial process water, etc.

Water treatment



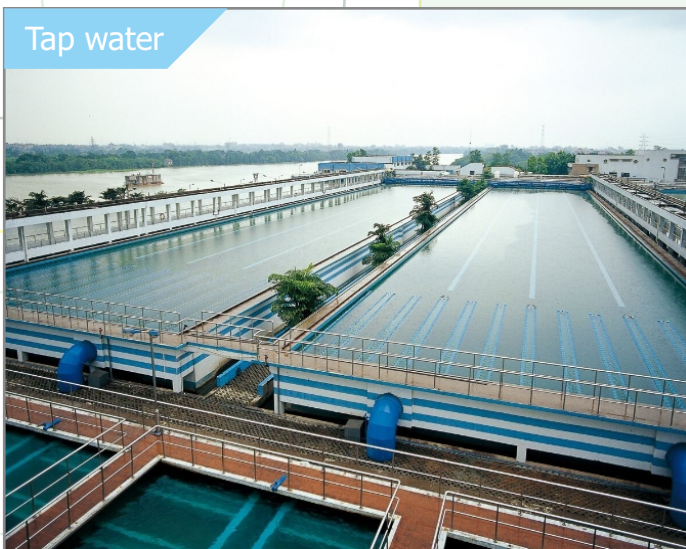
Chemical engineering




Irrigate



Tap water



Water processing plant

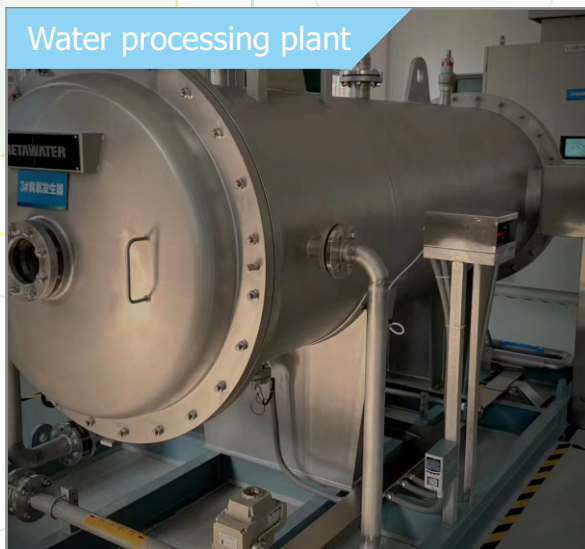

Specification

Product	Portable Ultrasonic Flow Meter
Accuracy	+/-0.5% (at 0.5m/s to 5.0m/s)
Flow range	0.1 m/s-12.0m/s
Linearity	+/-0.5% (at 0.5m/s to 5.0m/s)
Repeatability	0.15%
Response	500ms
Display screen	3.5" 480*320 IPS LCD can 360 spins (easy to read)
Language	English, Chinese Simplified, Chinese Traditional
Display unit	Metric and English units are available, can be based on m3, L, GAL and other 7 flow units and day, hour, min, sec, 4 kinds of time unit collocation view
Display data	Flow rate, Flow velocity, net totalizer, single totalizer, day-month-year totalizer
Number of displays	Display 10 digits
Data storage	10 years, 64 months, 64 days
Keypad	4 touch key
Calendar battery	CR1220
Power supply	24VDC@5W
Analog output	4 ~ 20mA, Maximum load: 600Ω
Communication	RS485, support Modbus RTU protocol
Alarm output	OCT, Upper and lower limit alarm function
Relay output	30VDC@1A, switching frequency less than 2Hz
Medium	Water, Chemical solvents etc (inclusions less 4%)
IP Grade	Unit: IP54; Sensor: IP68
Pipe range	DN25-DN5000
Housing material	Aluminum alloy
Temperature resistance	Unit: -40°C-60°C; Sensor: -40°C-80°C
Environment temp	-40°C-60°C
Environment humidity	0-95% relative humidity, without condensation
Viscosity	<100CST (mm²/s)
Cable length	Stand length: 5m (can be extended to 20 m.)


Weight

Unit: kg


Model	Unit	Sensor
Kgs	0.82	1.29

Dimensions


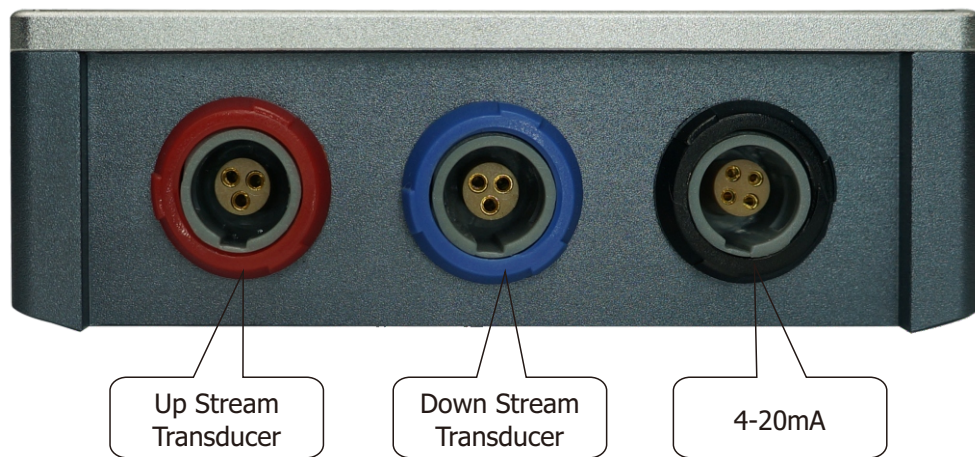
Wiring diagram



Dimensions

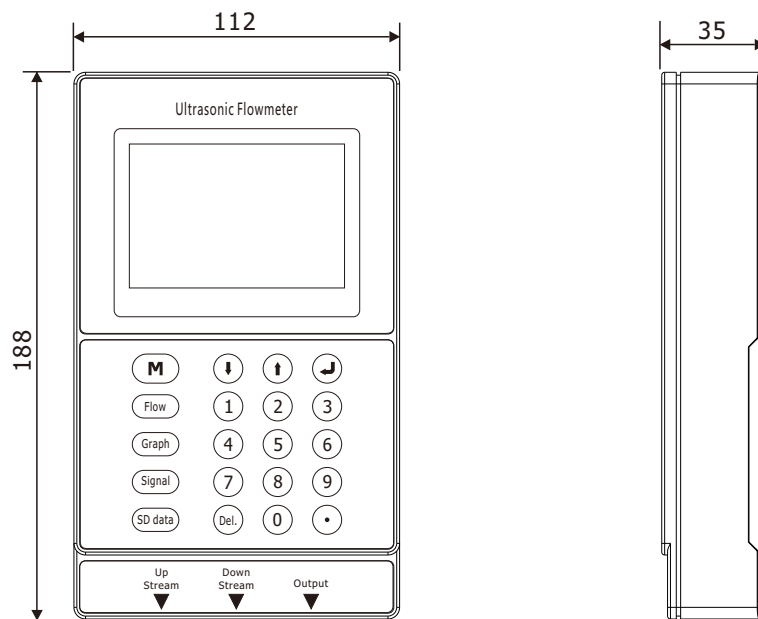


Transmitter dimensions (mm)

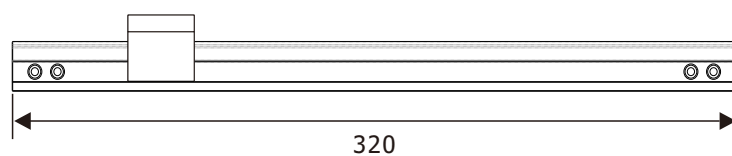


Rack Size (mm)

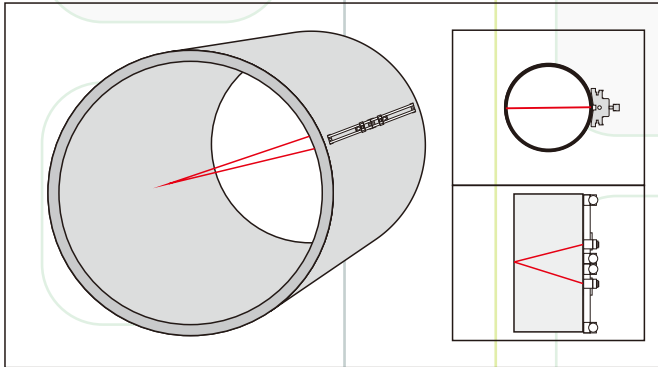Installation methods



α V Method

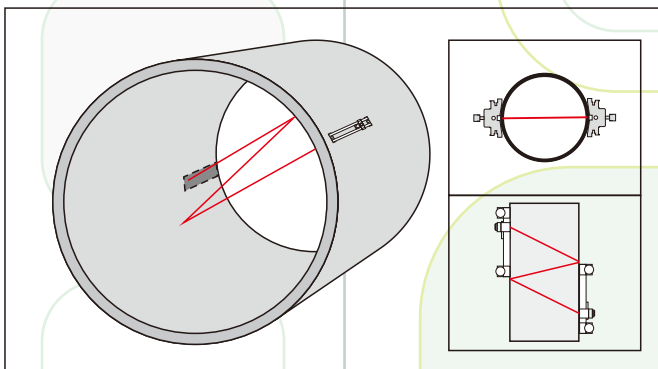
The V method is considered as the standard method. It usually gives a more accurate reading and is used on pipe diameters ranging from 25mm to 400mm (1"~16") approximately. Also, it is convenient to use, but still requires proper installation of the transducer, contact on the pipe at the pipe's centerline and equal spacing on either side of the centerline.



α N Method

With the N method, the sound waves traverse the fluid three times and bounce twice off the pipe walls. It is suitable for small pipe diameter measurement.

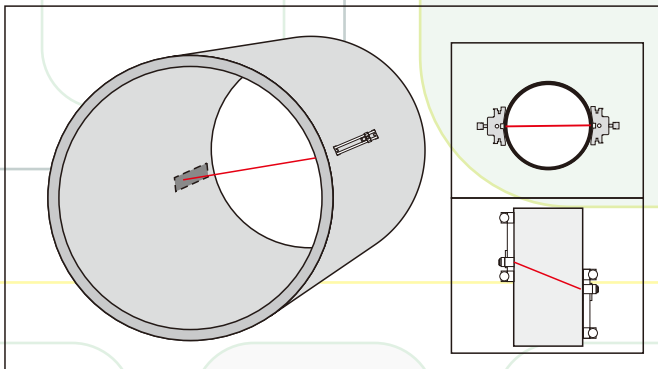
The measurement accuracy can be improved by extending the transit distance with the N method (uncommonly used).



α Z Method

The signal transmitted in a Z method installation has less attenuation than a signal transmitted with the V method. This is because the Z method utilizes a directly transmitted (rather than reflected) signal which transverses the liquid only once.

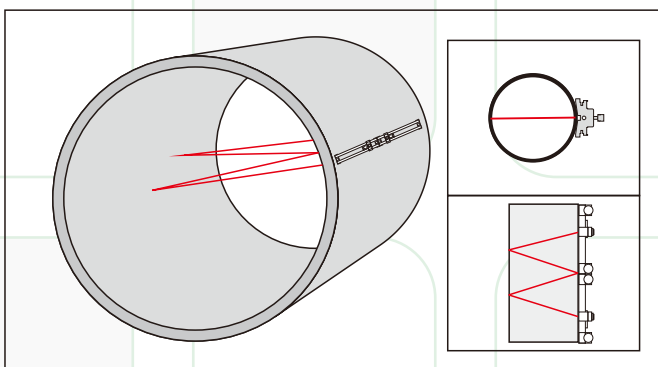The Z method is able to measure on pipe diameters ranging from 100mm to 2000mm (4"~80").



α W Method

As with the N method, the measurement accuracy can also be improved by extending the transit distance with the W method. The sound wave traverses the fluid four times and bounces three times off the pipe walls.

It is suitable for very small pipe (diameters less than 50mm, 2").

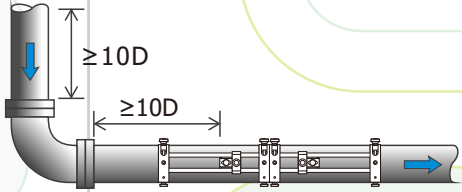
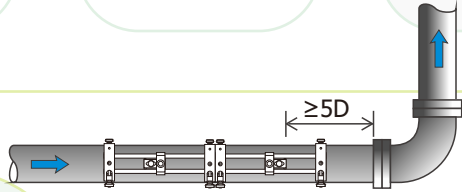
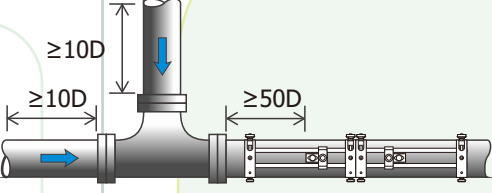
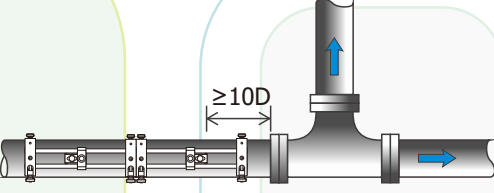






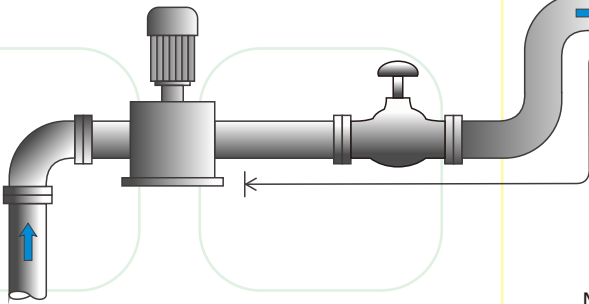

Measurement Site Selection

When selecting a measurement site, it is important to select an area where the fluid flow profile is

liquid, such as a vertical pipe with flow in the upward direction or a full horizontal pipe. Make sure

limits. Consider the inside condition of the pipe carefully. If possible, select a section of pipe where its inside is free excessive corrosion or scaling.

Examples acceptable measurement site selection are shown in the figure below.

Site	Installation point front straight section	Straight pipe section after installation point
Elbow		
Tee		
Expanded pipes		
Reducing pipe		
Valve		
Pump		

Note: D is the outer diameter of the pipe

Ordering Information

Code	Description
YF-P2	Portable Ultrasonic Flow Meter YF-P2
	Installation method: Portable
	Accuracy: +/-0.5%(0.5m/s-5.0m/s)
	Repeatability: 0.15%
	Linearity: +/-0.5%(0.5m/s-5.0m/s)
	Pipe size: DN25-DN5000 (1"-200")
	Keypad: twenty Touch key
	Display: 3.5" 480*320 IPS LCD can 360 spins (easy to read)
	Power supply: 24 VDC@5W
	Transmitter enclosure: IP54, CNC machining of aluminum alloy
	Output: 4~20mA
Code	Input and output
1	4-20mA, OCT pulse output, RS485
Code	Transmitter enclosure area classification
1	IP54, CNC machining of aluminum alloy
2	Customer specific requirements
Code	Type of transducers
CP6	Rack transducer. Operating temperature: -40°F~176°F (-40°C~80°C)
Code	Transducer cable length
033	Cable length 16.5 feet (5m)
xxx	Extended length, up to 66 feet (20m), per 16 feet (5m) is a lengthen unit

Product Component



- ① Portable Ultrasonic Flow meter YF-P2
- ② Transducer
- ③ Transducer Cable
- ④ Output Wire
- ⑤ Battery Charger
- ⑥ Rack
- ⑦ Stator
- ⑧ Coupling compound
- ⑨ SD card reader
- ⑩ Flexible rule
- ⑪ Case

Ordering information

Ultrasonic flowmeter data sheet

Please fill in your information in as much detail as possible, if you need help, please contact our business manager, we will be happy to help you.

Name:	Tel:	Title:	Unit:	Filling date:
Quantity on demand:	In the next 12 months:	In the next 2 to 3 years:		

Pipe material:	Outer diameter: mm	Wall thickness: mm	Fluid:	Temperature: °C	Corrosivity: ☐ Yes
Minimum flow:	Maximum flow:	Viscosity:	Velocity of sound:	Pressure: mpa	
Unit of measurement: ☐ L/min ☐ m³/h ☐ Else _____					

Available Power supply:	The standard product is 24VDC power supply, if you need 220VAC, optional external power converter? ☐ Yes
Straight pipe: upstream length _____ mm, downstream length _____ mm	Installation site: ☐ Vertical tube ☐ Horizontal pipe
IP Grade ☐ IP54 ☐ IP66	Installation area: ☐ not dangerous ☐ danger, anti-hazard classification _____

Output: ☐ RS485, 4-20mA ☐ 4-20mA, OCT ☐ Other requirements (please specify): _____
Cable length (standard 2 meters): need to be extended m, ☐ No need for extension

☐ See list for more requirements

The above information is not detailed enough, what else do you have to say: